

# okvolight®

Technology Inside



SLOOPY SERIES

► **DECORATIVE**  
PANEL LUMINAIRES

# SLOPY SERIES LED PANEL

## Products Features

### Mounting Type

Surface Mounted on Ceiling

### Body

Asymmetrical housing design, electrostatic powder coated DKP sheet.

### Diffuser

Opal diffuser with prismatic surface, providing homogeneous light

### LED

≥50,000 h lifetime, high efficiency and high color quality index.

### Color Temperature

Cool White, Natural White, Warm White and 3in1 CCT options

### Driver

Constant current LED driver with high efficiency,

### Operating Temperature

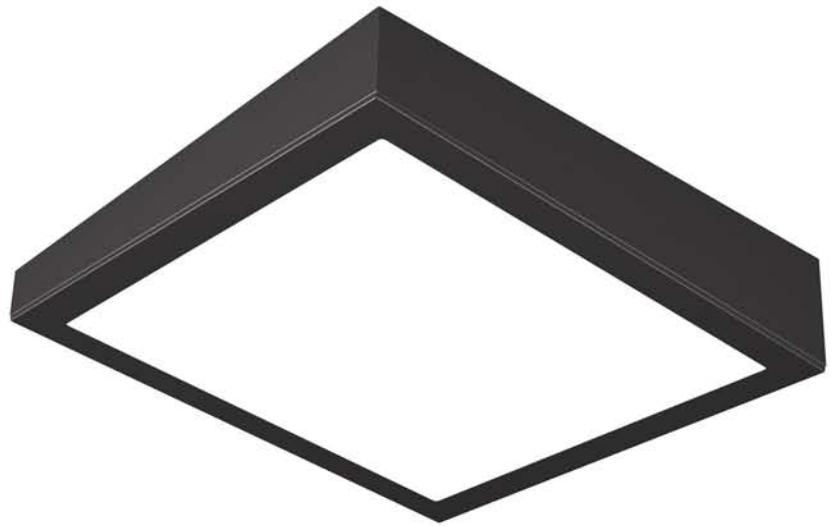
-25 ° C / + 50 ° C operating ambient temperature range

### Dimension Alternatives

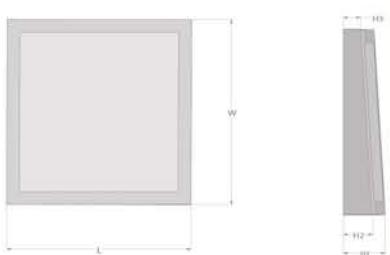
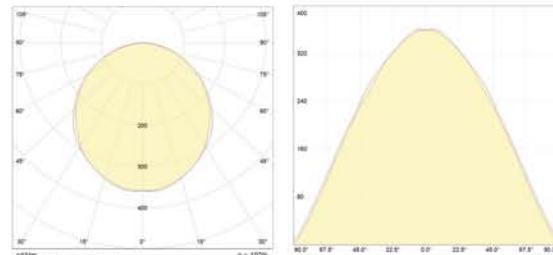
600x600 mm, 300x300 mm, 300x600 mm, 300x1200 mm , 600x1200 mm

### Optional & Additional Features

- ▶ DALI Driver Compatible
- ▶ Dimmable with DIMM Moduls
- ▶ Emergency Lighting Kit (1-3 hours)
- ▶ OKVO Smart Applications



Multi-CCT Technology	Product Benefits	Areas Of Application
 <p>Three CCT options in the one product by user controlled</p>	<ul style="list-style-type: none"> <li>▶ Energy savings of up to 50 % compared to conventional luminaires</li> <li>▶ High luminous efficiency, very homogeneous light</li> <li>▶ No IR or UV radiation</li> <li>▶ Long lifetime and low maintenance costs</li> <li>▶ Easy and quick installation,</li> <li>▶ Compatible with the latest lighting control technology.</li> </ul>	<ul style="list-style-type: none"> <li>▶ Architectural Indoor Lightings,</li> <li>▶ Offices, Corridors, Meeting Rooms,</li> <li>▶ Schools, Hotels and Hospitals,</li> <li>▶ Retails and Shopping Centers,</li> <li>▶ Conference and Ballrooms,</li> <li>▶ Enterances and Livingrooms</li> </ul>

Dimensions	Mounting Hole Sizes	Weight	Photometric Diagrams
 <p>LxW: 600x600 mm H1xH2xH3: 135x100x65 mm</p>	 <p>L1 x W1 = 540 x 375 mm</p>	 <p>5kg</p>	

Product Series	Product Model	Product Code	Color Temperature	Lumen	CRI	PFC(λ)	Power	Voltage	Lifetime	Dimensions	Warranty	
SLOPY SERIES	BRONZE	AXP.SLP.0606.***.SFC.BNZ	3000 K 4500 K 6500 K	3300 lm	Ra > 80	>0.92	33 W	220-240 V @50-60 Hz	50,000 h	600x600	2 Years	
	TITANIUM	AXP.SLP.0606.***.SFC.TNM	3000 K 4500 K 6500 K	3400 lm	Ra > 85	>0.92				135x100x65 mm		3 Years
	SILVER	AXP.SLP.0606.***.SFC.SLV		3500lm	Ra > 80	>0.92	33 W	220-240 V @50-60 Hz	50,000 h	600x600	3 Years	
	GOLD	AXP.SLP.0606.***.SFC.GLD		3600 lm	Ra > 85	>0.92				135x100x65 mm		3 Years
	PLATINIUM	AXP.SLP.0606.***.SFC.PLT		3600 lm	Ra > 85	>0.95				135x100x65 mm		3 Years

\*\*\* 2D Patterns: LEAKY - PIXY - MESHY - VINDER - TWINKLE - FI - CI

\*\*\* 3D Patterns: FOSTERY - FOSTERO - EAVES - SPARKY - CROWN -RIGIDY - SENSE

For more information on other models, [www.okvolight.com](http://www.okvolight.com)



ASYMMETRICAL LINEAR USAGE | SLOPY



SYMMETRICAL MODULAR USAGE | SLOPY



ASYMMETRICAL MODULAR USAGE | SLOPY

# okvolight®

Mimarsinan Organize Sanayi Bölgesi  
Kastim Cad. No:22/B Kayseri / TURKEY  
T : +90 352 228 00 28  
F : +90 352 228 00 29

© 2018, Okvolight. All rights reserved.

We reserve the right to change specifications, product descriptions, product quality, pricing and application at any time without prior written or oral notice.