


AXP SLOPY 6060 SURFACE

Slopy Series | Decorative Panel Luminaires

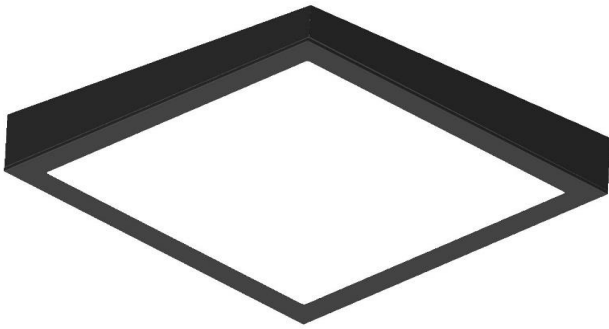

Areas of application

- Hotels, Shops and Shopping Centers,
- Museums, Exhibitions, Conferences and Ballrooms
- Business Centers, Offices and Corridors,
- Halls, Living Rooms and Living Areas
- Schools, Hospitals and Public Institutions
- Prefabricated and Modular Campuses

Products benefits

- The possibility of using three white colors in the same product
- Quick , simple and safe replacement without rewiring
- Low maintenance costs thanks to long lifetime
- Instant-on light , therefore ideally suitable in combination with sensor technology
- Correct operation even at low temperature

Product features

- Design: Ceiling LED luminaires with metal frame in high value design
- Color Temperature: 2700 - 3000 K (Warm White), 4000 - 4750 K (Natural White) or 6500-7000 K (Cool White)
- Mounting Type: Surface mounting
- Type Of Protection: IP40
- Lifetime: up to 50,000h
- Warranty Time: 2 Years min.




info@okvolight.com

Technical Data


Electrical Data

Nominal input wattage (AC)	33 W
Lamp output wattage (DC)	28.7 W
Nominal input voltage	220 V AC
Nominal input frequency	50/60 Hz
Nominal input current	0.15 A
Driver efficiency	85-90 %
LED forward current	50 mA
Power Factor λ	≥ 0.90
Output current tolerance	$\pm 5 \%$

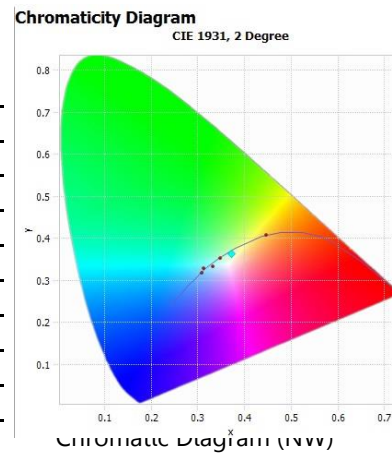


Phometrical Data

Color temperature	2700 - 3300 K	4000 - 4750 K	6500 - 7000 K
Luminous flux	3300-3400 lm	3400-3500 lm	3500-3600 lm
Light color (Destination)	WW	NW	CW
Color rendering index Ra	> 80 - 85	> 85 - 90	> 82 - 87

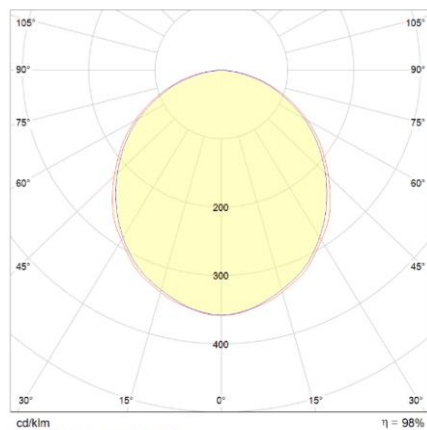

Polar Graph for Naturel White Color

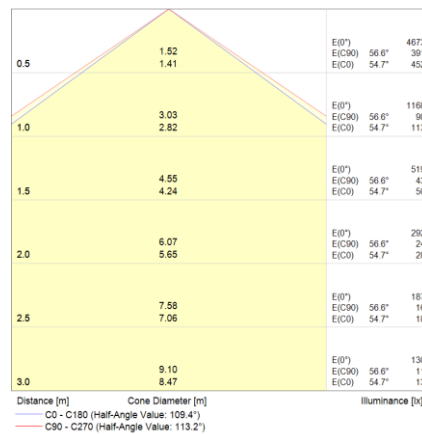

Conic Graph for Naturel White Color

Light technical data

Beam angle	Extremely wide distribution, 120°
Light distribution	Symmetric

Temperatures

Operating Temperature	-20...+50 °C
Storage Temperature	-30 / +60



info@okvolight.com

Materials

Body material	Sheet Metal
Body color	Ral 9016 bright
Cover material	Sheet Metal
Cover color	Ral 9016 texture matte/Optional

Capabilities

Type of connection	Cable & connector
Color change	3 in 1, manuel
DALI control	Optional
Dimmable	Optional
Emergency lighting kit	Optional

Additional product data

Diffuser material	Polystyrene
Diffuser efficiency	80%-86%
Diffuser type	Single ragged surface

Certificates & Standarts


IEC Protection class	Class I
Ingress Protection Rating	IP40
Standarts	TS EN 60598-2-2 , TS EN 60598-1 , TS EN 62471 , TS EN 13032-1 , TS EN 62031
Certificates	CE , TSE

Model Options

MODEL	CODE	COLOR MODE	COLOR	LUMEN	CRI	LED
BRONZE	AXP.SLP.6060.SFC.BNZ	1	WW/NW/CW	3300lm	Ra> 80	PLESSEY
SILVER	AXP.SLP.6060.SFC.SLV	1	WW/NW/CW	3400lm	Ra> 85	OSRAM
GOLD	AXP.SLP.6060.SFC.GLD	3	WW-NW-CW	3500lm	Ra> 80	PLESSEY
PLATINUM	AXP.SLP.6060.SFC.PLT	3	WW-NW-CW	3600lm	Ra> 85	OSRAM
DIAMOND	AXP.SLP.6060.SFC.DMD	3	WW-NW-CW	3600lm	Ra> 85	OSRAM

Dimensions & Weight

Length (L)	600 mm
Width (W)	600 mm
Height (H1)	135 mm
Height (H2)	100 mm
Height (H3)	65 mm
Product weight	5 kg
Mounting hole length (L1)	540mm
Mounting hole width (W1)	375mm
Mounting type	Surface mounting on ceiling

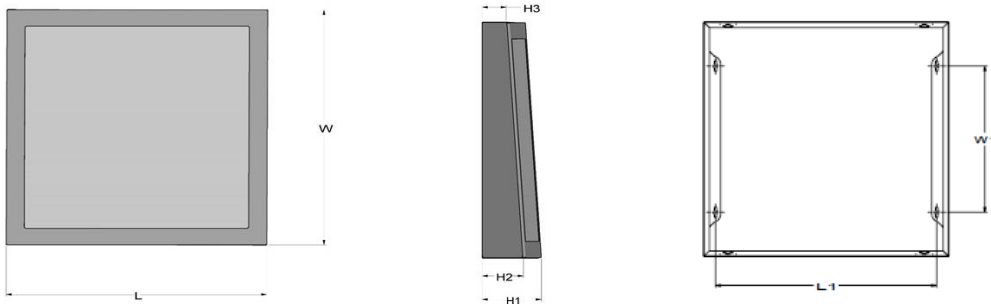

Logistical data

Product code	Product description	Single Packaging Dimensions (L x W x H)	Single Packaging Volume (dm3)	Single Packaging Gross Weight	Multi Packaging unit	Multi Packaging Dimensions (L x W x H)	Multi Packaging Volume (dm3)	Multi Packaging Gross Weight
	BASIC SURFACE	620x620x90 mm	10,8	5,4 kg	30 pcs	80x120x136 cm	1349,12	163 kg

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

Driver OSRAM
-Osram Driver Datasheet

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.